



International

Isolation Transformer

3 Stage Protection

Models

ILc-9000-0338

9kVA
400V Delta
3 Phase Input
230/400V Wye
3 Phase Output

ILc-16500-0338

16.5kVA
400V Delta
3 Phase Input
230/400V Wye
3 Phase Output

Three Phase Low-Impedance Isolation Transformer Line Conditioner

TSi Power's ILc Series Line Conditioners provide the best all-round power conditioning and surge protection for sensitive electronic equipment. The integral isolation transformer provides 100% isolation from the input AC line ~ the secondary neutral-to-ground bond eliminates all surge voltages between neutral and ground. Surge protection & noise filtering are superior to conventional surge protection & filtering devices.

Typical Applications

Designed for situations where reliability and predictability matter to the enterprise. Examples include: sensitive telecommunications industrial and medical equipment, and other sensitive, specialized microprocessor-based equipment.

Key Benefits

ILc Series conditioners provide maximum equipment protection against surges, spikes and transients, for higher equipment reliability and maximum equipment operating life. In addition, improved repeatability, fewer reboots or system lock-ups. In addition, a reduction in equipment down time and service costs can be expected.

TSi's use of three separate transformers, one per phase, minimizes single phasing or lost phase problems associated with a common core three phase transformer.

How ILc Conditioners Work

The integral isolation transformers provide complete isolation between the primary and secondary, and permits bonding its output neutral to ground, which completely eliminates all disturbances between neutral and ground. The leakage inductance of the isolation transformer in combination with capacitive elements and MOV's, provide superb noise filtering, as well as coordinated multi-stage surge protection in accordance with the principles of IEC-61312.



Key Features Of The TSi Isolation Line Conditioner

- Coordinated Surge Protection Per IEC61312
- Three Separate Low-Impedance Isolation Transformers (1 Per Phase) Are Used For Maximum Reliability
- Common-Mode Noise Elimination
- Advanced Noise & Interference Filter Reduces dV/dt from 6kV/μS to less than 10V/μS
- Wall-Fixing Kit Included
- High Efficiency
- Quiet Operation
- 5 Year Warranty



TSi Power Corporation

1103 West Pierce Ave
Antigo, WI 54409
USA
715.623.0636
800.874.3160
Fax 715.623.2426
sales@tsipower.com
www.tsipower.com



Isolation Line Conditioner



Left-Side Front View


TSi's ongoing product improvement process makes specifications subject to change. Other companies product names herein are for identification purposes only, and may be trademarks of their respective companies.

Specification	ILc-9000-0338	ILc-16500-0338
Electrical		
Capacity in VA (Watts)	9 kVA (9,000W)	16.5 kVA (16,500W)
Transformer Type	Three Separate Isolation Transformers Are Used (1 Per Phase)	
Input		
Nominal Voltage	400 Volts AC Three Phase Delta	
Operating Range	400V(L-L), +30%,-20%	
Nominal Frequency	50Hz +/-3	
Input Circuit Breakers	3 x 30 Amps (ganged)	3 x 40 Amps (ganged)
AC Connections	Terminal block (L1, L2, L3 & Ground wires) provided.	
Output		
Nominal Voltage	230/400 Volts AC Three Phase Wye	
Power Efficiency	96% at 400V(L-L), (typical)	
Operating Range	230/400Volts +30%,-20%	
Matching AVR	VRp-9000-0338	VRp-16500-0338
Surge Protection	A three-stage surge protection system consisting of isolation transformer, capacitor and M.O.V. is included.	
Surge Test Conditions*	Class 2 & Class 3 Simulated Lightning Surge (Combination Wave) Per ANSI/IEEE C62.41-1991, Cat. C Test Waveform: 6kV, 3kA, 8x20µS. *Note: ILC is not a Primary (Class 1) surge arrestor - customer must provide a separate primary surge arrestor at service entry point.	
Surge Let-Through Voltages	Single Pulse: L-N: 50 V, L-G: 50V, N-G: 0.5V Ring Wave: L-N: 20V, L-G: 20V, N-G: 0.5V Combination Wave: L-N: 250V, L-G: 250V, N-G: 0.5V The measured rate of voltage rise/fall (dV/dt of the remnant waveform is less than 10V/µS with input test waveform dV/dt of 6kV/µS	
Common Mode Filtering	Neutral-ground bond eliminates all noise or voltage on neutral (< 0.5V)	
Normal Mode Filtering	A built-in inductor-capacitor filter attenuates EMI/RFI noise from output.	
AC Connections	Terminal block (L1, L2, L3, Neutral & Ground wires) provided.	
Physical		
Dimensions	610 mm Wide x 965 mm High x 305 mm Deep, on rubber mounting feet.	
Weight	140kg	170kg
Safety		
Standards	Designed to meet IEC 60950. Enclosure protection class: IP20.	
Environmental		
Ambient Temperature	-5° to +35°C. 10 to 90% Relative Humidity (non-condensing).	
Cooling Method	Fan cooled.	
Warranty		
Warranty	5 Year Limited Warranty, Parts and Labor.	



TSi Power Corporation
1103 West Pierce Ave
Antigo, WI 54409
USA
715.623.0636
800.874.3160
Fax 715.623.2426
sales@tsipower.com
www.tsipower.com

Copyright © 2005 TSi

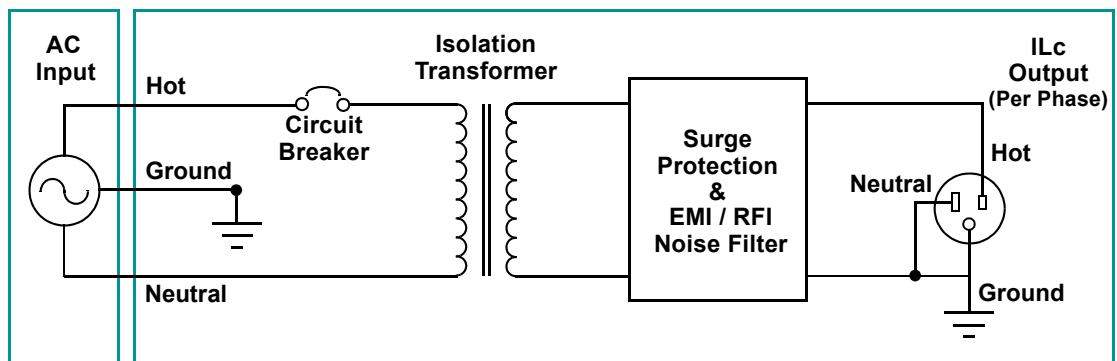

ILc System Architecture (Per Phase)